


CONFIGURATION - ELECTRICAL DATA - OVERALL DIMENSION IN METER

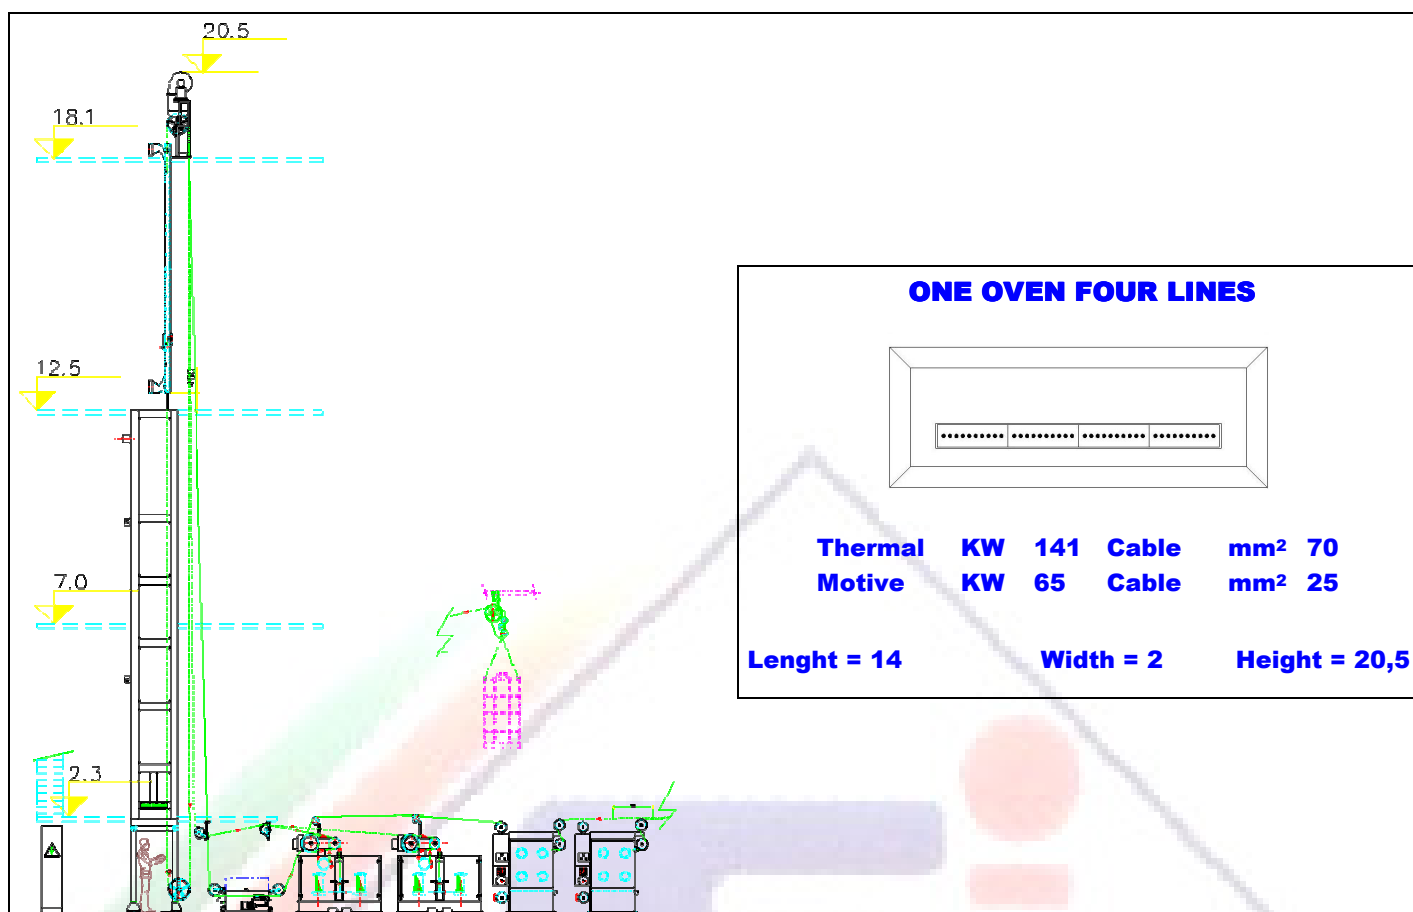

APPROX ELECTRICAL CONSUMPTION

range[mm]	1,50	1,60	1,80	2,00	2,24	2,50	2,80	3,15
PEI KW	0,80	0,79	0,77	0,75	0,72	0,67	0,65	0,64
PU KW	0,60	0,59	0,58	0,56	0,54	0,51	0,49	0,48

- **Bare wire pay-off with braking system - whiskers - or brake pulley**
- **Drawing machine skin pass type 8 passes - ring dia. 120mm capstan 350mm - max Inlet dia 4,0 - scalar elongation from 40% to 24%**
- **Wire cleaning system after drawing machine**
- **Annealing oven total length 16 mt - 3 temperature control**
- **Double dies applicator wire pitch 16,5mm - 14 base - 4 top -**
- **Two enamel tanks in stainless steel 45/90lt - two bypass filters, motors, pumps etc.**
- **Enamelling oven chamber length 10 mt - preheating 2,5 mt**
- **Wires cooling system length 7 mt counterflow fresh air**
- **Wire lubricating system felts type stainless steel tank capacity 0,5 lt.**
- **Take up automatic change over - spool min Din 160 max 400/630 or similar**
- **All Sheaves - cones - rollers are ceramic oxide covered**
- **Continuity tester with measurement field until 1500 Volts**

PRODUCTION SPEEDS

IEC	AWG	PEI Grade 1		PU Grade 1	
		[m/min]	V*D	[m/min]	V*D
1,5	14 ½	56	84	62	93
1,6	14	48	77	53	84
1,8	13	38	69	42	76
2	12	33	65	36	72
2,24	11	27	61	30	67
2,5	10	23	59	26	64
2,8	9 ½	17	48	19	52
3,15	8 ½	14	44	15	48

OUTPUT kg/h per line

PEI Grade 1	PU Grade 1
[kgh/line]	[kgh/line]
52,8	57,5
51,5	55,8
51,6	57,0
55,3	58,7
56,8	63,1
60,3	65,5
55,9	59,2
58,2	62,4

Values for Grade 2 application, above guaranteed figures will be reduced by 10%

Values for second enamel (PAI or NY), above guaranteed figures will be reduced by 15%

Plant running speeds depend on various factors such as enamel characteristics, copper quality, number of passes and so on. Under normal running conditions, the plant will run the above indicated speed when using good quality materials and enamels by us suggested having solid content in this range 38÷40% for PEI and 31÷34% for PU.

The final quality level is in compliance with the IEC standards.

During commissioning acceptance test will be considered positive if production speeds values will be reached at the 90%.